




Hardware & Accessories for
**uPVC & Aluminium Doors,
Windows & Curtain Walls**

www.mccoy8m.in | 8010-434-434

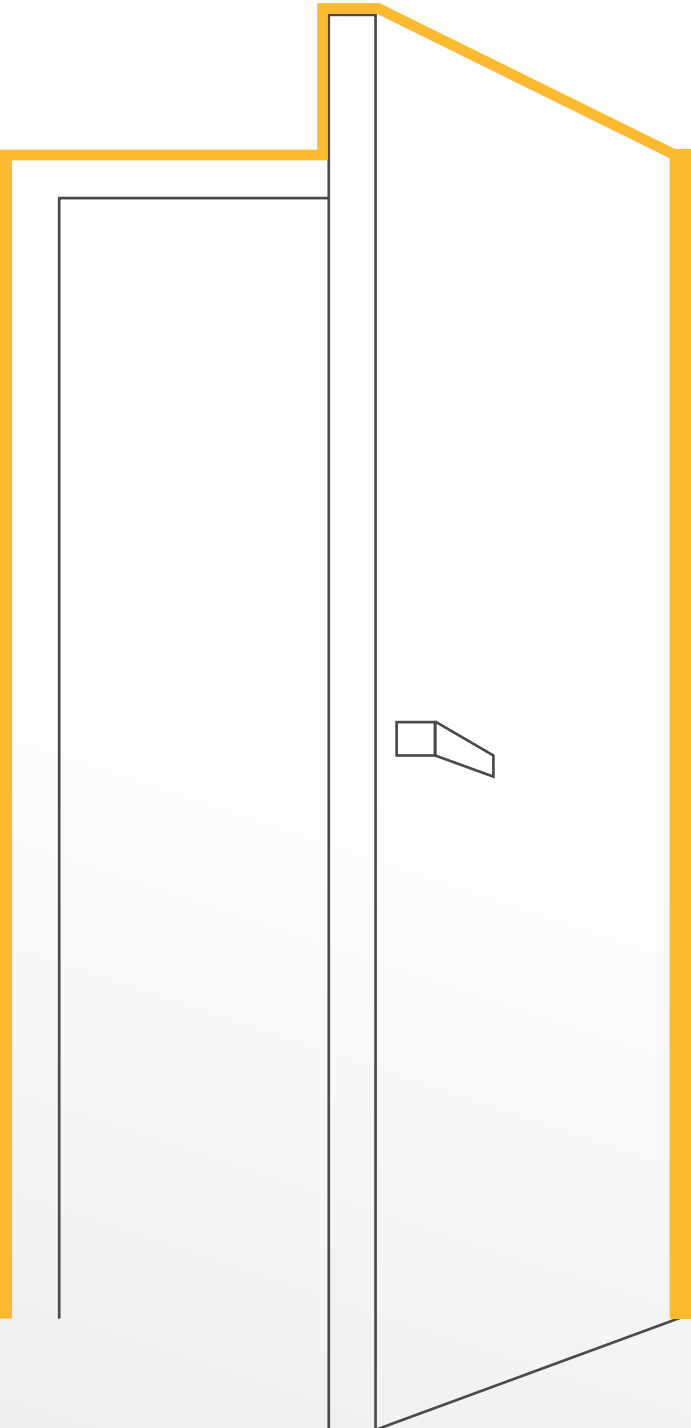

McCoy Eco Plus Series Friction Stay

SS202 Grade

McCoy Eco Plus Series

SS202Grade

Highlights:

- Quality 4 Bar Friction Hinges made from Cr-Ni-Mo Grade SS202 Steel for Light Commercial and Residential applications.
- 16.5 mm. Stack Height suitable for both Aluminium as well as PVC-U applications.
- Specially designed for Side Hung and Top Hung Vents for Aluminium as well as PVC-U Windows.
- Base width of 18 mm., suitable for most profiles.
- Self Balancing with excellent weather sealing capabilities.
- Pressure adjustment screw for catering to different sash weights.
- Capable of withstanding positive as well as negative wind loads in closed condition.
- Vent openable up to 88°.
- Suitable options available for Side Hung Vent sizes upto 700 mm x 1400 mm. and Vent weights up to 23 kg.
- Easy to clean outside glass surface as the sash shifts sufficiently away from the jamb.
- 24x7 Technical Support.
- Guaranteed for 10 years.



Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsibility for the results obtained. In every case it is recommended to carry out preliminary experiments.

McCoy Silicones Limited

(Facade & Fenestration Division)

C-55, Okhla Industrial Area, Phase-1, New Delhi-110020

Tel: +91-11-40623344 | Fax: +91-11-40623355

info@mccoy8m.in | 8010-434-434
mccoygroup.in | mccoy8m.in





Certification



McCoy Soudal is proud to be associated with:



M
A **McCoy Group Company**

	Feature	Advantage	Benefit
	Symmetrical Arrow Head End Point and End Cap	Symmetrical Arrow Head End Point and Cap enable opening of the Hinge on either side, universally.	Precludes the spoiling of Hinge on inadvertant opening on the wrong side.
	Composite Stainless Steel and Plastic Slider	Smoother and Stick – Slip free movement of Vent, low wear and tear due to no Metal to Metal contact and Self Cleaning of debris.	Longer Service Life and low maintenance.
	Made from High Quality Cr-Ni-Mn Grade SS304 Stainless Steel.	Economically priced	Value for Money.
	Friction Adjustment	Regulates the amount of Force required to open and close the window.	Comfortable and easy to operate for the user.
	Self Balancing capabilities	Precludes the automatic closure of sash due to its own weight.	Safer as there is no chance of the sash closing down accidentally.
	Vent openable up to 88°	Better ventilation and easy to clean outer glass surface	Keeps room fresh and ventilated and makes cleaning easier. Also possibility of Emergency egress.

Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsibility for the results obtained. In every case it is recommended to carry out preliminary experiments.

McCoy Silicones Limited

(Facade & Fenestration Division)

C-55, Okhla Industrial Area, Phase-1, New Delhi-110020

Tel: +91-11-40623344 | Fax: +91-11-40623355

info@mccoy8m.in | 8010-434-434

mccoygroup.in | mccoy8m.in

Certification



McCoy Soudal is proud to be associated with:



M
A **McCoy Group Company**

Technical Data



Product Name	Stack Height	Bar Thickness	Number of Arm	Hung	Height (mm)	Width (mm)	Weight Capacity	Opening Angle*
McCoy Eco Plus FS - 8"	16.5 mm	2.5 mm	4	Side Hung	1400	500	8 Kg	67° ± 2°
McCoy Eco Plus FS - 10"	16.5 mm	2.5 mm	4	Side Hung	1400	500	15 Kg	43° / 88° ± 2°
McCoy Eco Plus FS - 12"	16.5 mm	2.5 mm	4	Side Hung	1400	600	20 Kg	53° / 88° ± 2°
McCoy Eco Plus FS - 14"	16.5 mm	2.5 mm	4	Side Hung	1400	650	22 Kg	43° / 88° ± 2°
McCoy Eco Plus FS - 16"	16.5 mm	2.5 mm	4	Side Hung	1400	700	23 Kg	53° / 88° ± 2°

* Shows the recommended range of opening angles.

Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsibility for the results obtained. In every case it is recommended to carry out preliminary experiments.

McCoy Silicones Limited

(Facade & Fenestration Division)

C-55, Okhla Industrial Area, Phase-1, New Delhi-110020

Tel: +91-11-40623344 | Fax: +91-11-40623355

info@mccoy8m.in | 8010-434-434

mccoygroup.in | mccoy8m.in

Certification



McCoy Soudal is proud to be associated with:



A McCoy Group Company

WELCOME TO THE WORLD OF TECHNOLOGY

MCCOY PARTNER SELF SERVICE (PSS) APP



- ✓ Quick order
- ✓ Check order status
- ✓ Check account
- ✓ Loyalty rewards
- ✓ Product videos etc..

Download Now



Products available online on
mccoymart.com

www.mccoy8m.in | +91-8010434434

Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsibility for the results obtained. In every case it is recommended to carry out preliminary experiments.