


Hardware & Accessories for
**uPVC & Aluminium Doors,
Windows & Curtain Walls**

www.mccoy8m.in | 8010-434-434

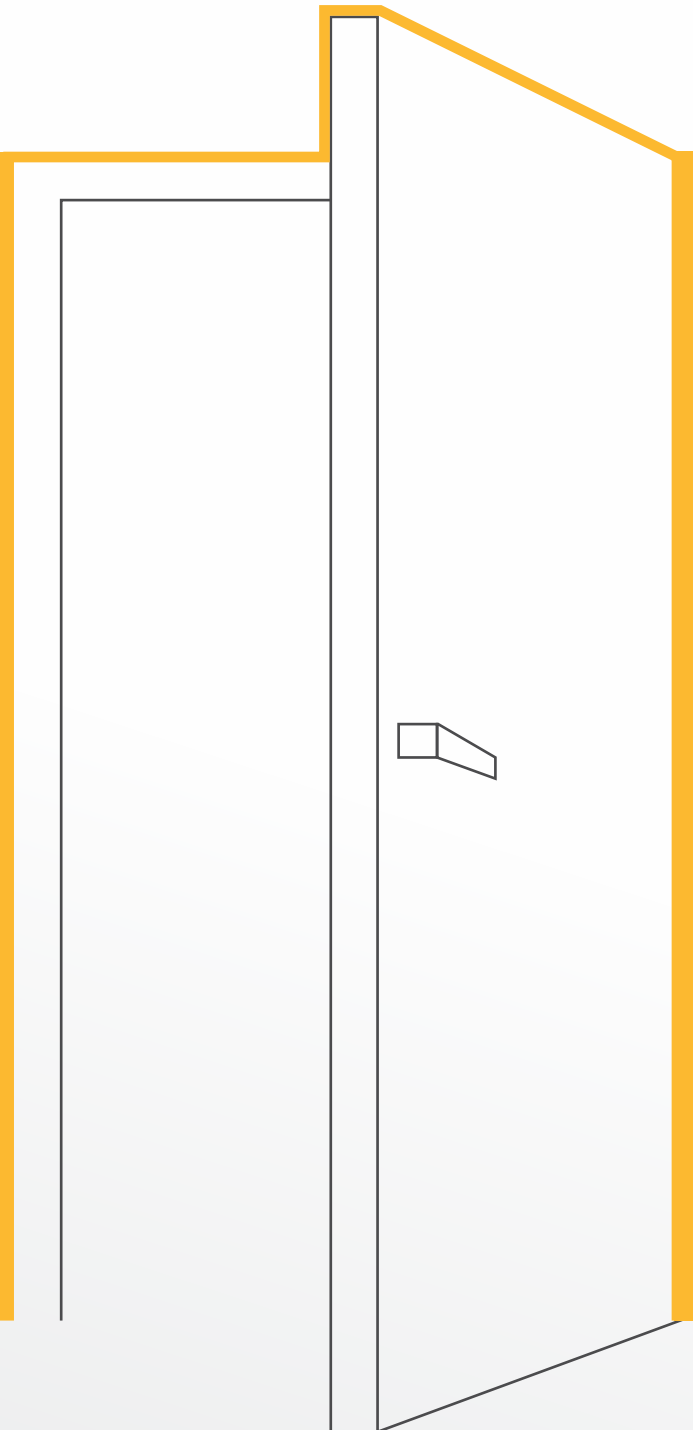

Multi-Point Locking Handle for PVC-U Casement Windows - McCoy EH-3

Multi-Point Locking Handle for PVC-U Casement Windows – McCoy EH-3

Highlights:

- A Multi-Point Locking Handle for Sliding PVC-U Windows. Can be used for Inward opening Casement windows also.
- A stylishly curved L Shaped Aluminium Zinc Alloy Die Cast Body.
- Suitable for most PVC-U profiles.
- Ergonomic design and easy to operate with lesser effort.
- Body made from the new family of Zinc-Aluminium based Die Casting Materials containing higher Aluminium than standard Zinc alloys characterized by high Strength and Hardness and good Bearing properties.
- Total height of the handle 60mm.
- Total length of the handle 146mm.
- The Base Width of the handle is 29mm.
- Spindle length is 35mm.
- Spindle Cross Section is 7mm. (+0.0/-0.1mm.)
- Standard package includes 2 nos. Fixing Screws M4 x 40mm. Long
- Available in White or Black Powder Coating finish. Other colours available on request.
- Coating thickness of 90 Microns.
- 24x7 Technical Support.
- Guaranteed for 10 years
- Packing size 100 per box.



Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsibility for the results obtained. In every case it is recommended to carry out preliminary experiments.

McCoy Silicones Limited

(Facade & Fenestration Division)

C-55, Okhla Industrial Area, Phase-1, New Delhi-110020

Tel: +91-11-40623344 | Fax: +91-11-40623355

info@mccoy8m.in | 8010-434-434

mccoygroup.in | mccoy8m.in

Certification




McCoy Soudal is proud to be associated with:



M
A McCoy Group Company

Feature	Advantage	Benefit
Spindle length 35 mm.	The spindle will reach and cross the Espag, thus giving a proper grip to operate.	Suitable for most Profile – Espag combinations. No slippage while operating inside the Espag hole, so longer service life.
Coating thickness 90 µm	Colour does not fade / come off due to weather conditions or repeated gripping by hand.	Longer service life.
Base width 29 mm.	Can be used for inward opening as well as sliding windows.	Suitable for use with most profiles.

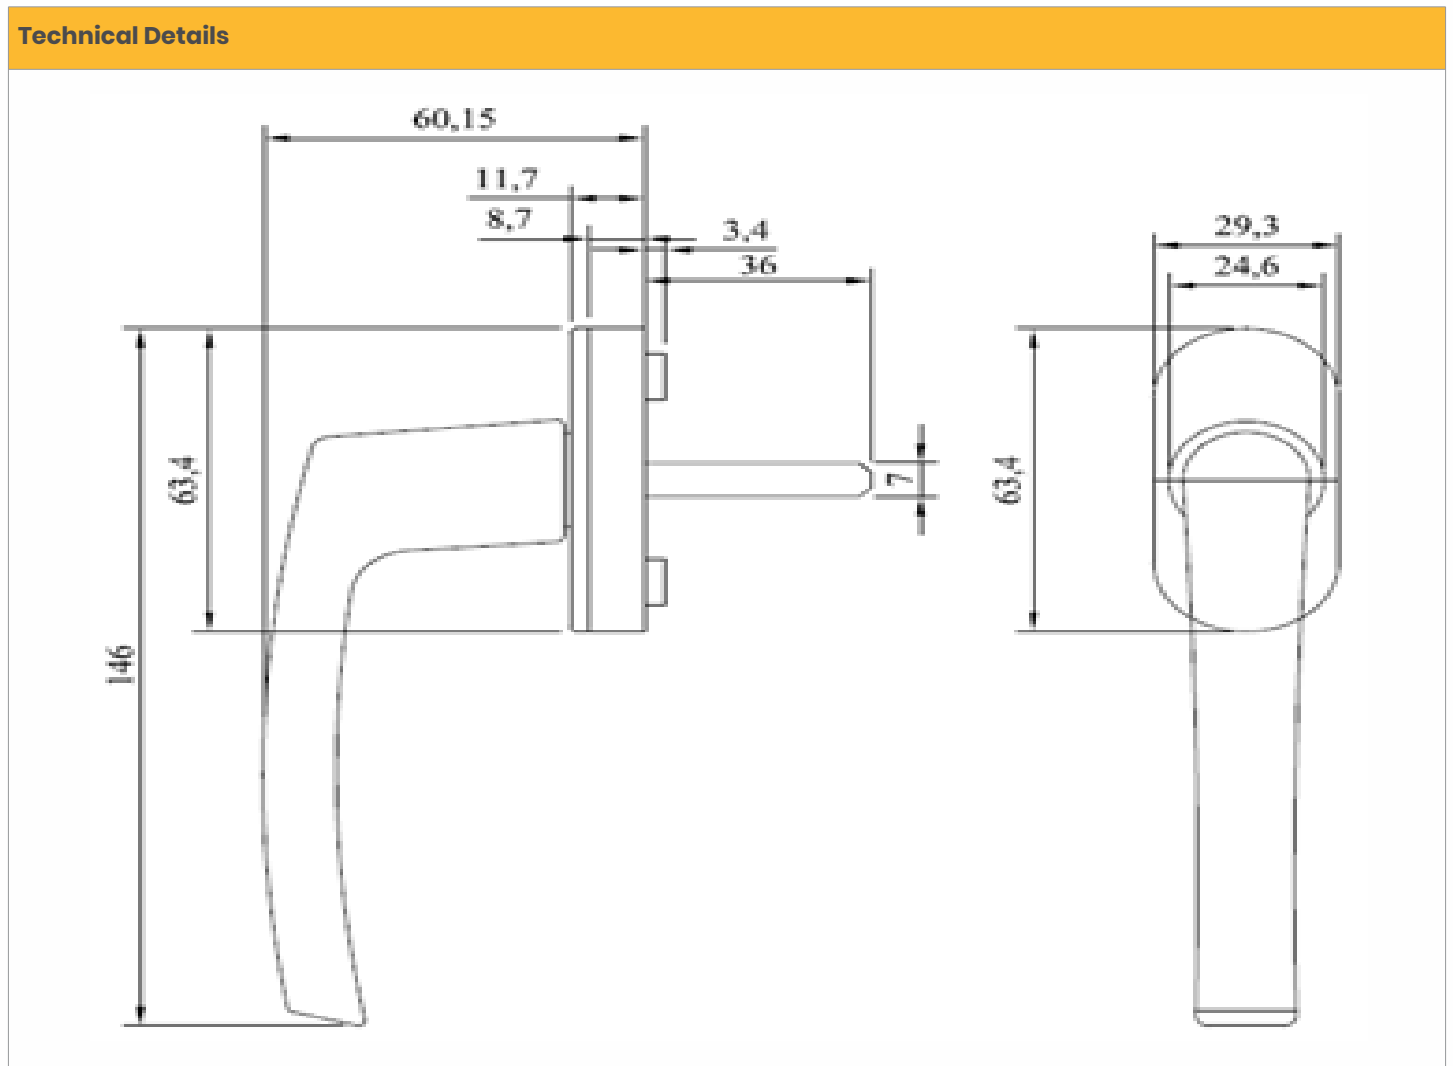

Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsibility for the results obtained. In every case it is recommended to carry out preliminary experiments.

WELCOME TO THE WORLD OF TECHNOLOGY
MCCOY PARTNER SELF SERVICE (PSS) APP



- ✓ Quick order
- ✓ Check order status
- ✓ Check account
- ✓ Loyalty rewards
- ✓ Product videos etc..

Download Now



Products available online on
mccoymart.com

www.mccoy8m.in ☎ +91-8010434434

Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsibility for the results obtained. In every case it is recommended to carry out preliminary experiments.

McCoy Silicones Limited

(Facade & Fenestration Division)

C-55, Okhla Industrial Area, Phase-1, New Delhi-110020

Tel: +91-11-40623344 | Fax: +91-11-40623355

info@mccoy8m.in | 8010-434-434
mccoygroup.in | mccoy8m.in

Certification



McCoy Soudal is proud to be associated with:



M
A **McCoy Group Company**