




Hardware & Accessories for
**uPVC & Aluminium Doors,
Windows & Curtain Walls**

www.mccoy8m.in | 8010-434-434

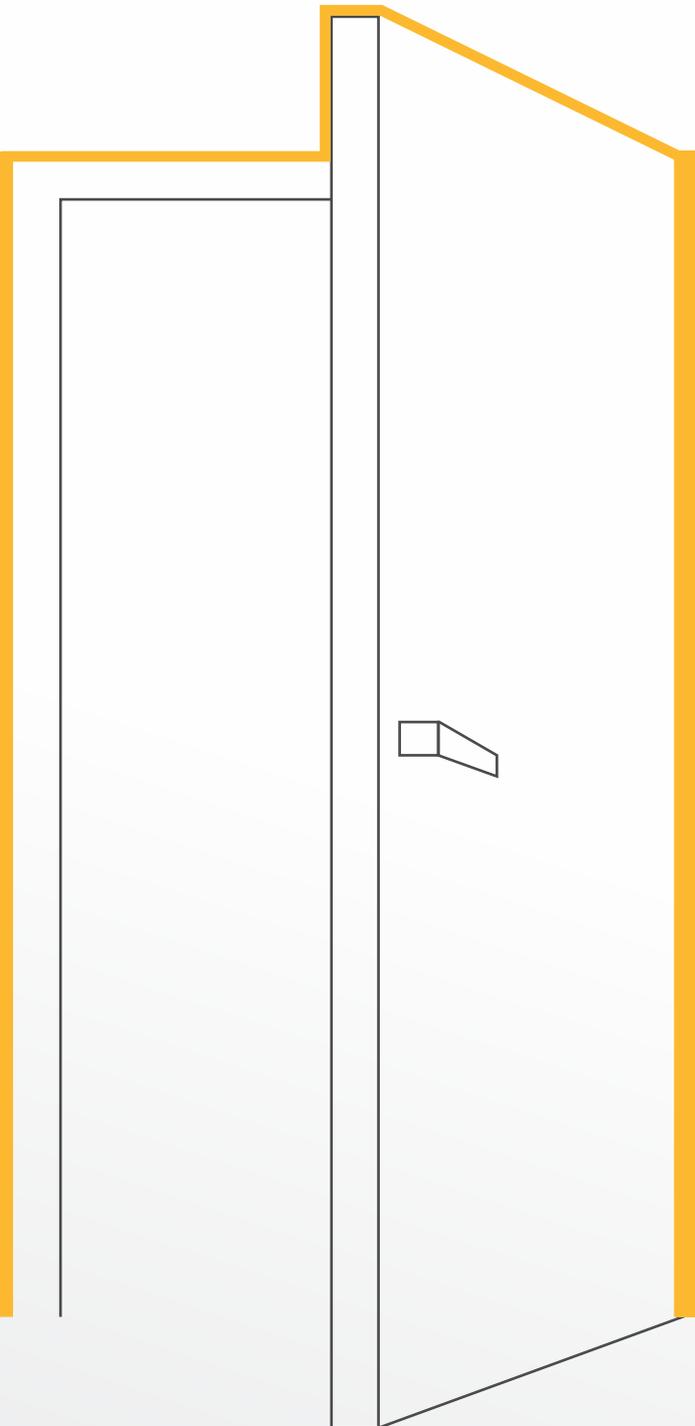

**Single Point Locking Handle for Aluminium
Sliding Windows – McCoy Trendy Pro**

Single Point Locking Handle for Aluminium Sliding Windows – McCoy Trendy Pro

Highlights:

- A single point Push Button operated Locking Handle for Aluminium Sliding Windows.
- Body made from Aluminium Alloy.
- Manual locking and unlocking.
- Easy to install with Push In and tightening with Allen Screw. The maximum fixing length is 182mm.
- Available in White or Black Powder Coating finish.
- Sleekly designed body with an overall Length of 195mm. and Width of 26mm.
- Coating thickness of 90µm.
- The Standard Packing consists of a Yellow Passivated Nib of Head Width 22mm. and Body Width 12mm. and Thickness 3mm., a Striker Plate of Length 90mm. x 9mm. with Slot dimensions of 35mm. x 4mm., and 2 nos. Hook Fixing Screws M3 x 18mm. long.
- 24x7 Technical Support.
- Guaranteed for 10 Years.
- Packing size 100 per box.



Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsibility for the results obtained. In every case it is recommended to carry out preliminary experiments.

McCoy Silicones Limited

(Facade & Fenestration Division)

C-55, Okhla Industrial Area, Phase-1, New Delhi-110020

Tel: +91-11-40623344 | Fax: +91-11-40623355

info@mccoy8m.in | 8010-434-434

mccoygroup.in | mccoy8m.in

Certification




McCoy Soudal is proud to be associated with:



M
A McCoy Group Company

Feature	Advantage	Benefit
Push Fit insertion with Screw tightening in the fixing slot.	Easy to install and takes less time and effort.	Easy to use for the installer.
Coating Thickness of 90µm.	Good resistance to Corrosion.	Can be used in adverse weather conditions also.
Aluminium alloy Die Cast body	Corrosion resistant.	Longer Service Life.

Technical Details

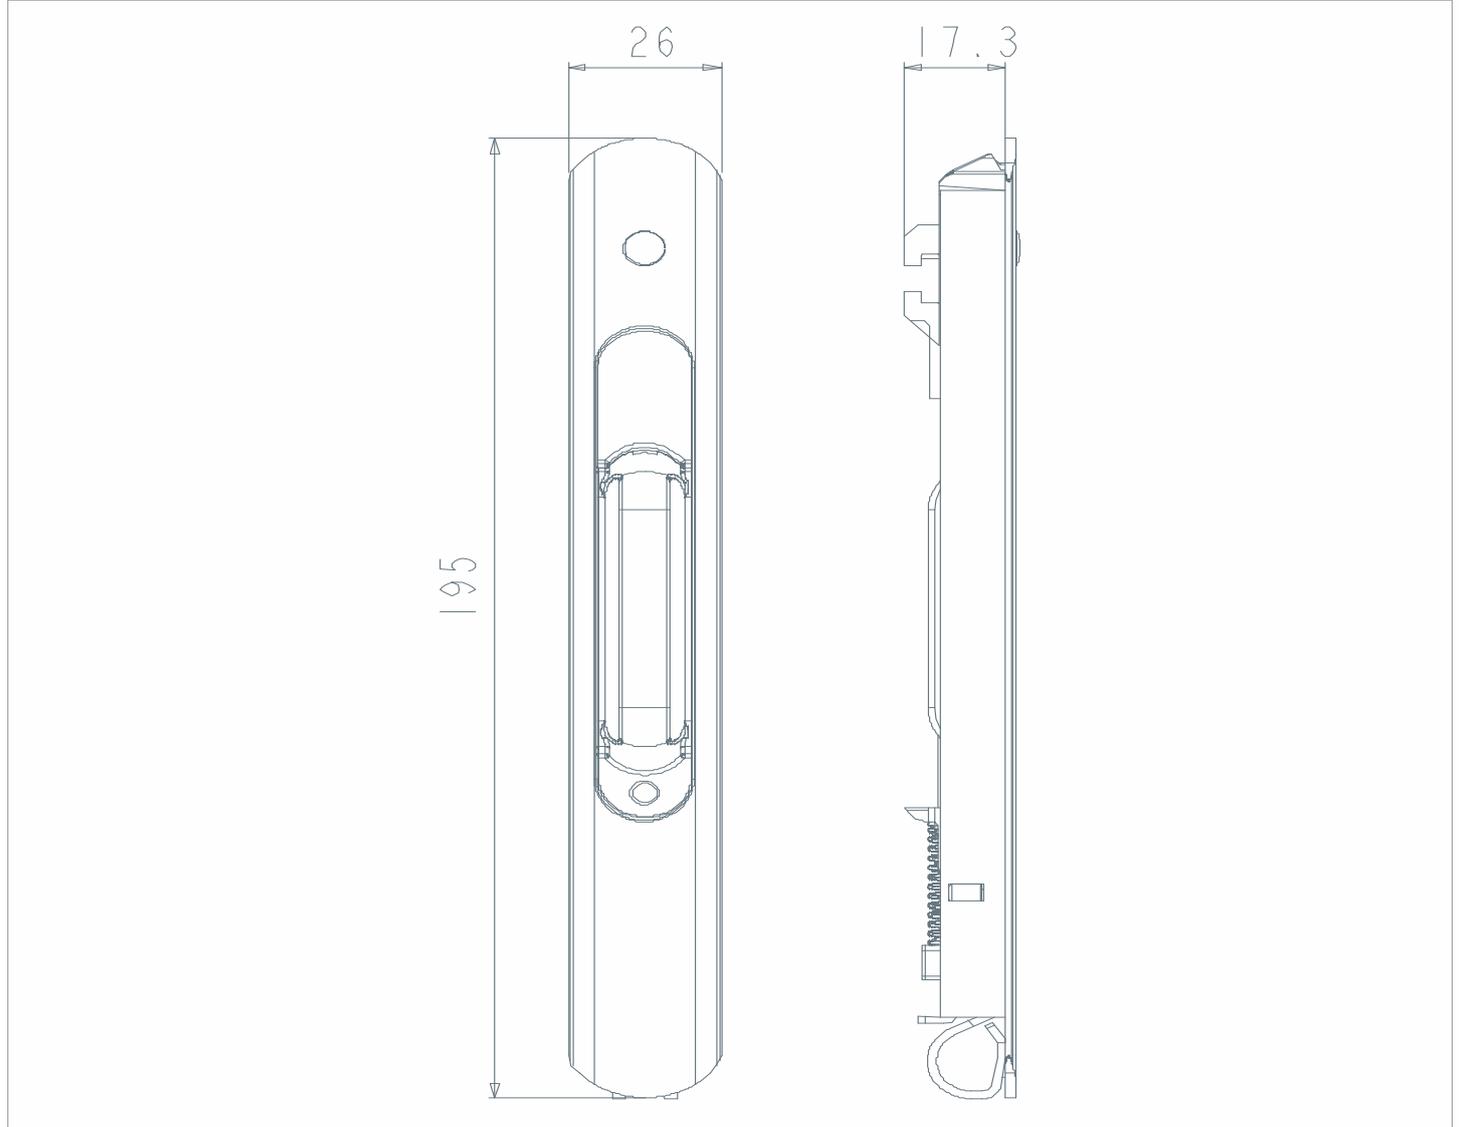

Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsibility for the results obtained. In every case it is recommended to carry out preliminary experiments.

WELCOME TO THE WORLD OF TECHNOLOGY
MCCOY PARTNER SELF SERVICE (PSS) APP



- ✓ Quick order
- ✓ Check order status
- ✓ Check account
- ✓ Loyalty rewards
- ✓ Product videos etc..

Download Now



Products available online on
mccoymart.com

www.mccoy8m.in | +91-8010434434

Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsibility for the results obtained. In every case it is recommended to carry out preliminary experiments.

McCoy Silicones Limited

(Facade & Fenestration Division)

C-55, Okhla Industrial Area, Phase-1, New Delhi-110020

Tel: +91-11-40623344 | Fax: +91-11-40623355

info@mccoy8m.in | 8010-434-434
mccoygroup.in | mccoy8m.in

Certification



McCoy Soudal is proud to be associated with:



M
A McCoy Group Company