

Central Locking Locking Handle for Aluminium Sliding Windows – McCoy SL-CPB



Central Locking Locking Handle for Aluminium Sliding Windows – McCoy SL-CPB

Highlights:

- A single point Push Button operated Retractable Lever operated Centrally Locking Handle for Aluminium Sliding Windows.
- A Die Cast Body made from Aluminium Alloy.
- Manual Push Button locking and unlocking by Retractable Lever.
- Available in White or Black Powder Coating finish.
- Sleekly designed curved Handle Lever for easy gripping.
- Overall Length of Handle is 171mm.
- The Base Width is 24mm. and the overall height of the Handle is 41mm.
- Coating thickness of 90 µm.

- The Standard Packing includes 1 nos. Retainer, 1 nos. Fixing Screw M3 x 24mm. long, 3 nos. Fixing Screws M3 x 20mm.long,1nos.TopScrewCap.
- The total travel of the Locking Pin is 9mm., i.e., from 35mm.(retracted) to 44mm.(extended)
- 24x7Technical Support.
- · Guaranteed for 10 Years.
- Packing size 100 per box.



Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in acod faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsability for the results obtained. In every case it is recommended to carry out preliminary experiments



(Facade & Fenestration Division) C-55. Okhla Industrial Area. Phase-1. New Delhi-110020 Tel: +91-11-40623344 | Fax: +91-11-40623355

info@mccoy8m.in | 8010-434-434 mccoygroup.in | mccoy8m.in

Certification






A McCoy Group Company



Feature	Advantage	Benefit
Coating Thickness of 90µm.	Good resistance to Corrosion.	Can be used in adverse weather conditions also.
Aluminium alloy Die Cast body	Corrosion resistant.	Longer Service Life.
One handle locks both sliding sashes.	Low Cost option for Locking 2 Track 2 Sash Sliding Windows with both movable sashes.	Economical option.

Technical Details

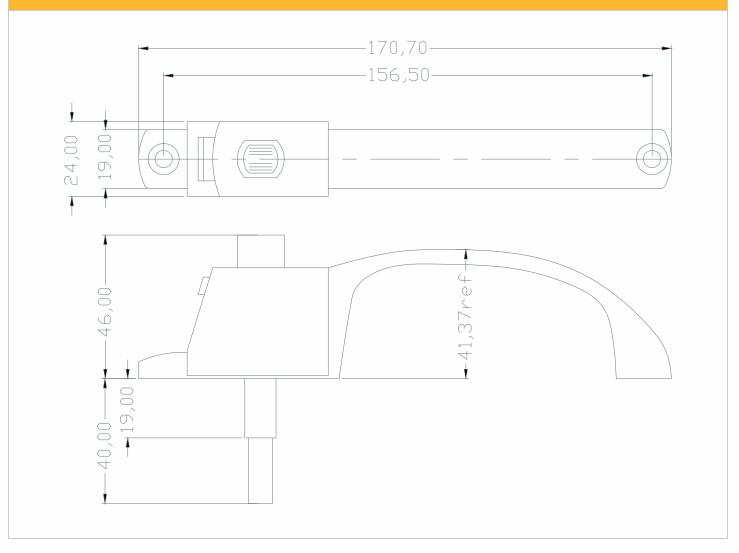

Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsability for the results obtained. In every case it is recommended to carry out preliminary experiments.



(Facade & Fenestration Division)

C-55, Okhla Industrial Area, Phase-1, New Delhi-110020 Tel: +91-11-40623344 | Fax: +91-11-40623355

info@mccoy8m.in|8010-434-434 mccoygroup.in | mccoy8m.in

Certification McCoy Soudal is proud to be associated with: SG



A McCoy Group Company

M





WEI COME TO THE WORLD OF TECHNOLOGY **MCCOY PARTNER SELF** SERVICE (PSS) APP



Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsability for the results obtained. In every case it is recommended to carry out preliminary experiments



(Facade & Fenestration Division) C-55, Okhla Industrial Area, Phase-1, New Delhi-110020 Tel: +91-11-40623344 | Fax: +91-11-40623355

info@mccoy8m.in | 8010-434-434 mccoygroup.in | mccoy8m.in



₽₽



A McCoy Group Company

