

Multi-Point Locking Handle for PVC-U Casement Windows – McCoy PBH-1



Multi-Point Locking Handle for PVC-U Casement Windows – McCoy PBH-1

Highlights:

- A Cranked Multi-Point Locking Handle for Outward opening PVC-U Windows. Can be used for Inward opening windows also.
- A stylishly curved Cranked L Shaped Aluminium Zinc Alloy Die Cast Body.
- Push button for Handle Operation.
- Left and Right hand Versions available.
- Suitable for most PVC-U profiles.
- Ergonomic design and easy to operate with lesser effort.
- Body made from the new family of Zinc-Aluminium based Die Casting Materials containing higher Aluminium than standard Zinc alloys characterized

- by high Strength and Hardness and good Bearing properties.
- Total height of the handle 58 mm.
- Total length of the handle 164 mm.
- The Base Width of the handle is 17 mm.
- Spindle length is 40 mm.
- Spindle Cross Section is 7mm (+0.0/-0.1mm.)
- · Available in White or Black Powder Coating finish.
- · Coating thickness of 90 Microns.
- 24x7Technical Support.
- Guaranteed for 10 years
- Packing size 80 per box.

Note: The Locking arrangement on this handle is meant purely as a child safety measure, and, should not be mis-construed as a barrier against an adult generated intrusion attempt.





Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsability for the results obtained. In every case it is recommended to carry out preliminary experiments.












McCoy Soudal is proud to be associated with:



Tel: +91-11-40623344 | Fax: +91-11-40623355




Feature	Advantage	Benefit
Spindle length 40 mm.	The spindle will reach and cross the Espag, thus giving a proper grip to operate.	Suitable for most Profile – Espag combinations. No slippage while operating inside the Espag hole, so longer service life.
Coating thickness 90 µm	Colour does not fade / come off due to weather conditions or repeated gripping by hand.	Longer service life.
Base width 17 mm.	Can be used for outward opening windows when there is constrained space on sash for mounting the handle.	Suitable for use with most profiles.
Push Button operation.	The handle cannot be opened inadvertently or by a child.	Enhanced safety.

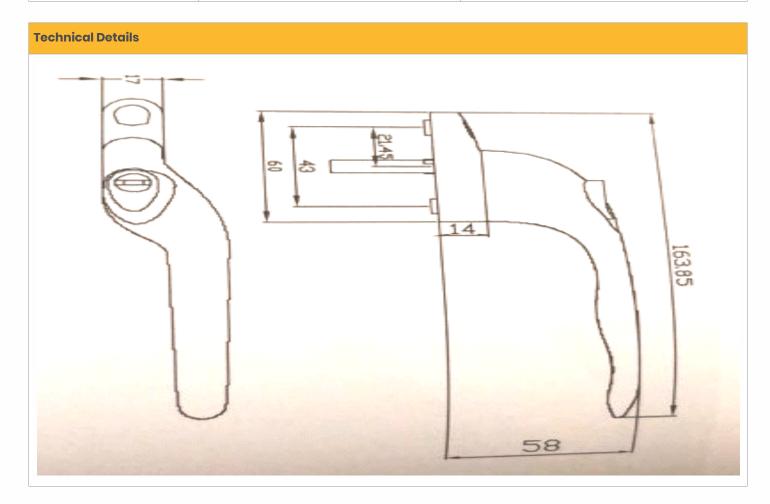

Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsability for the results obtained. In every case it is recommended to carry out preliminary experiments.



(Facade & Fenestration Division) C-55, Okhla Industrial Area, Phase-1, New Delhi-110020 Tel: +91-11-40623344 | Fax: +91-11-40623355












A McCoy Group Company





WELCOME TO THE WORLD OF TECHNOLOGY

MCCOY PARTNER SELF SERVICE (PSS) APP

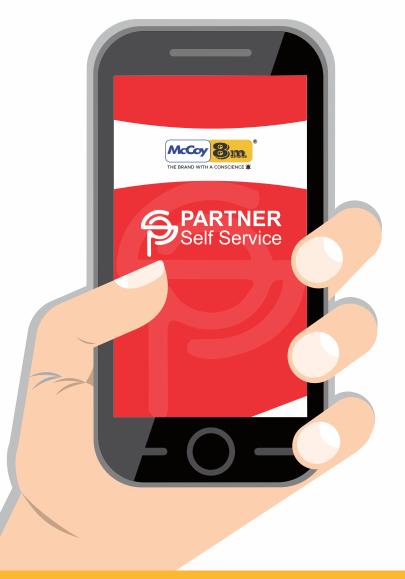

- Quick order
- Check order status
- Check account
- Loyalty rewards
- Product videos etc...

Download Now





Products available online on mccoymart.com

www.mccoy8m.in

(c) +91-8010434434

Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsability for the results obtained. In every case it is recommended to carry out preliminary experiments



(Facade & Fenestration Division) C-55, Okhla Industrial Area, Phase-1, New Delhi-110020 Tel: +91-11-40623344 | Fax: +91-11-40623355

info@mccoy8m.in | 8010-434-434 mccoygroup.in | mccoy8m.in











A McCoy Group Company

